


MDA Series




FEATURES

- Shielded construction
-
-
- Ultra low buzz noise, due to composite construction.
-
- AEC-Q200 qualified
- Operating temperature: -55 to +155 °C(including self-temperature rise)
- Quantity: 3000PCS


APPLICATION


- Noise filter for various drive circuitry requiring high temp. operation and peak current handling capability.
- Boost-Converter
- Buck-Converter DC/DC

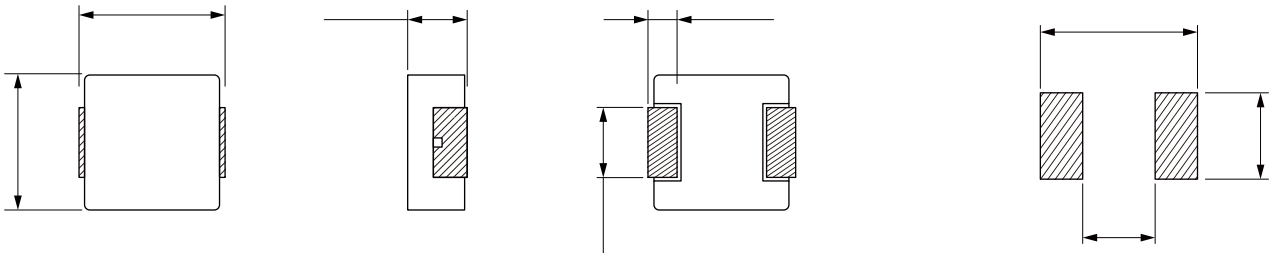


	(μH)				Saturation	Saturation	($\text{m}\Omega$)	($\text{m}\Omega$)




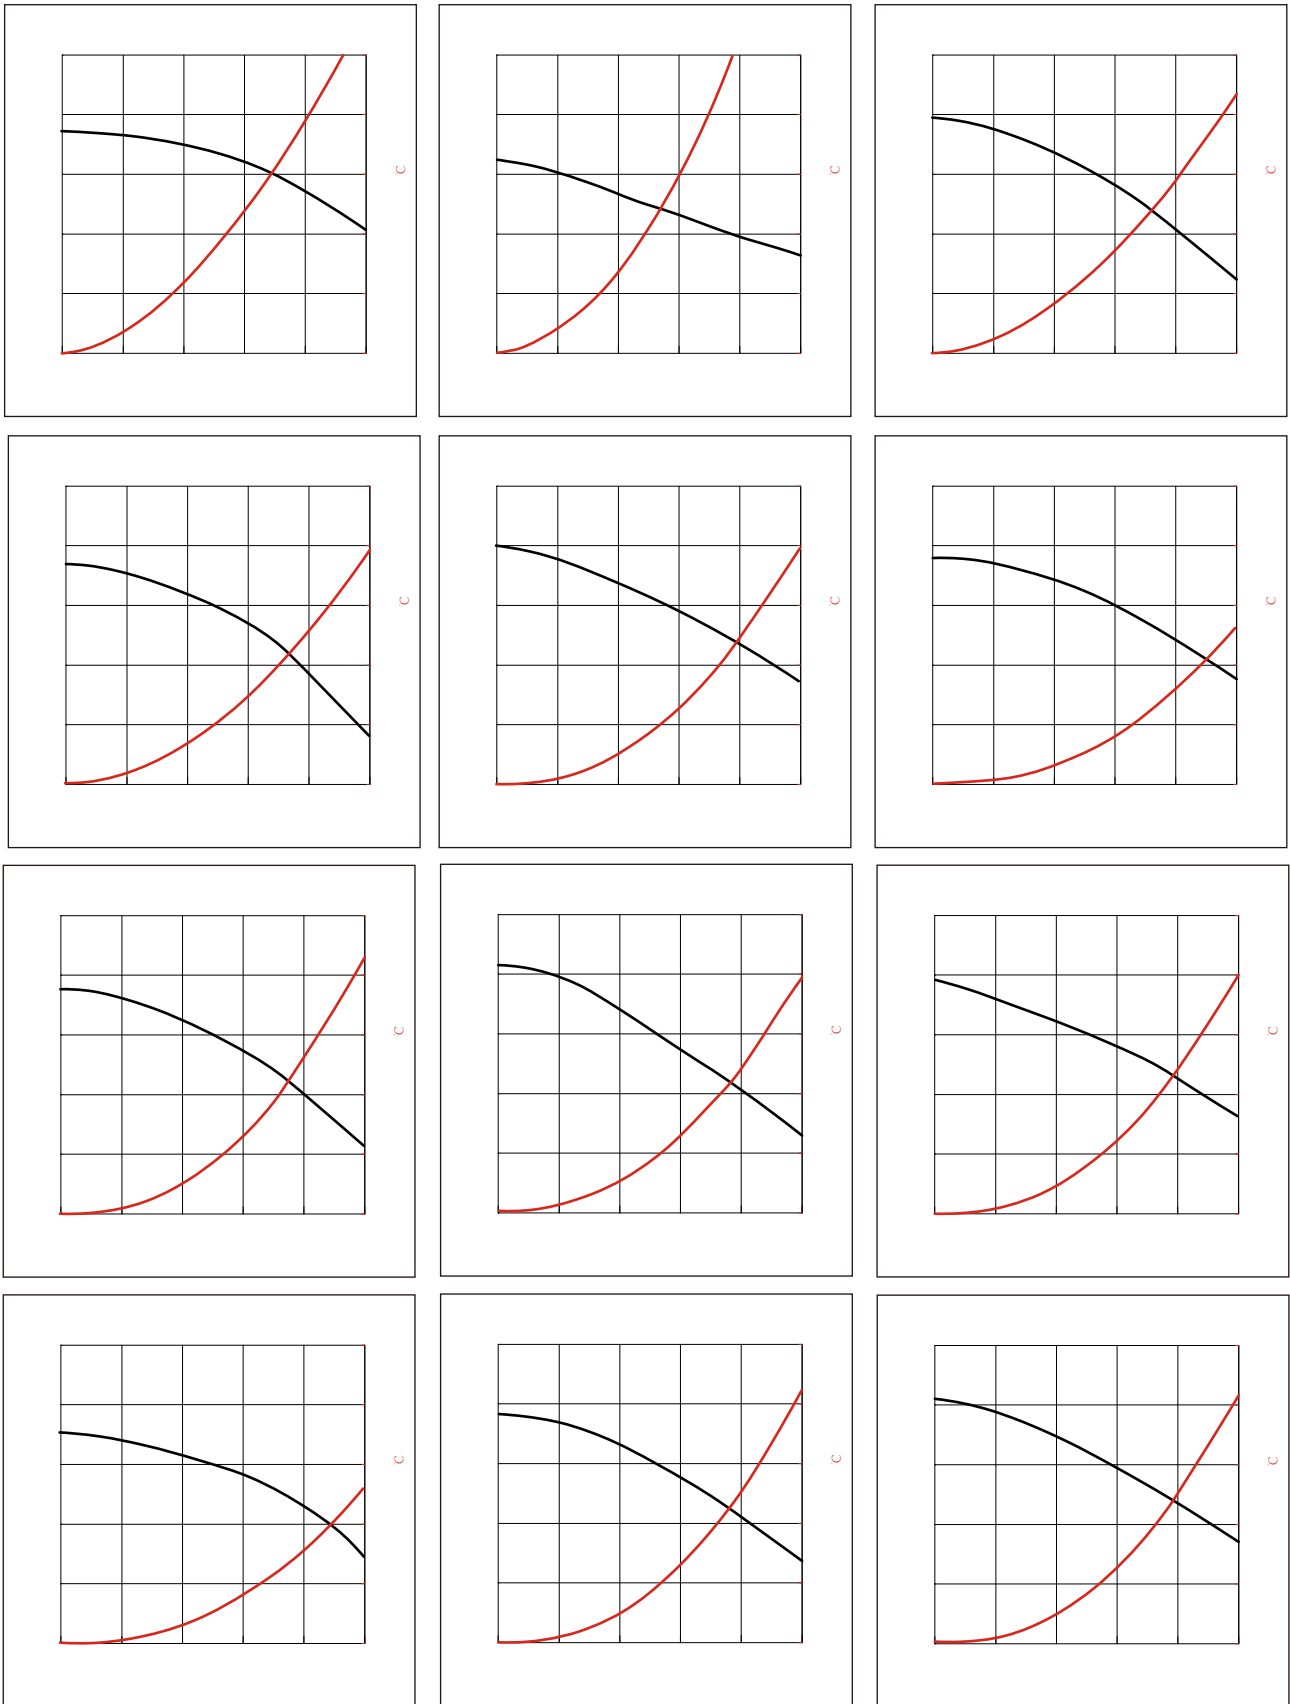

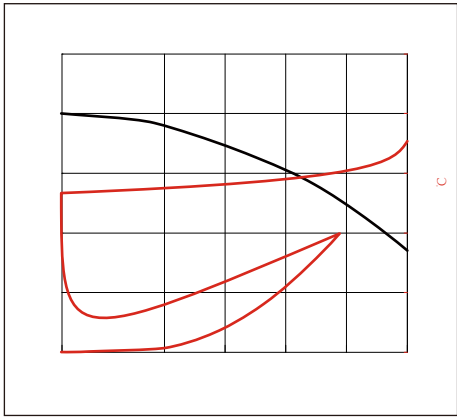


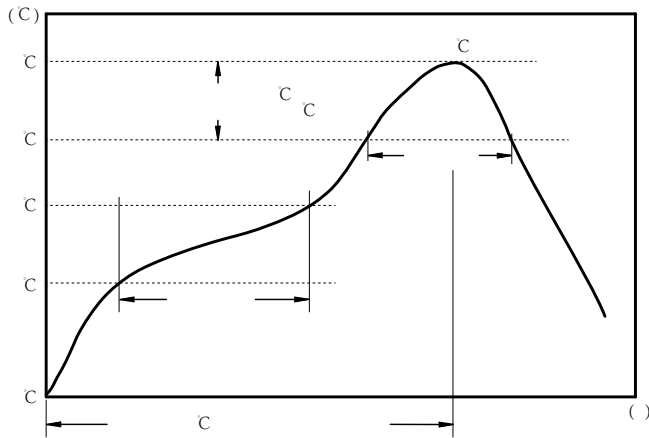

C
C
C

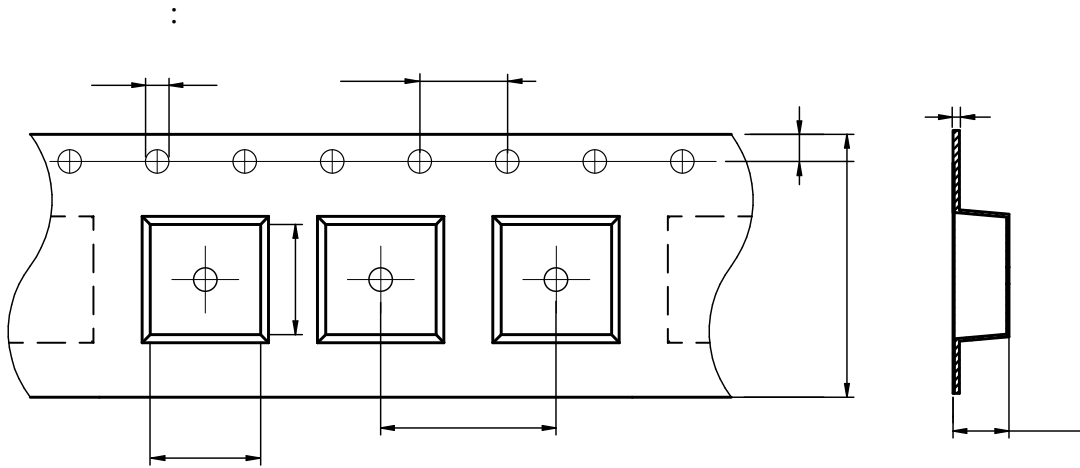





MDA4020	4.5± 0.1	4.85± 0.1	1.5± 0.1	4.0± 0.1	8.0± 0.1	12.0± 0.3	2.3± 0.1	1.75± 0.1	0.35± 0.05
---------	----------	-----------	----------	----------	----------	-----------	----------	-----------	------------

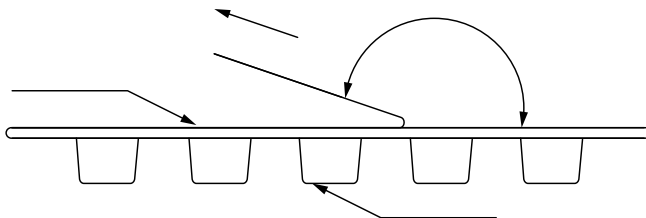


The peel force of top cover tape shall be between 0.1 to 1.3 N

Marking	K+Printing Inductance)
---------	------------------------


:

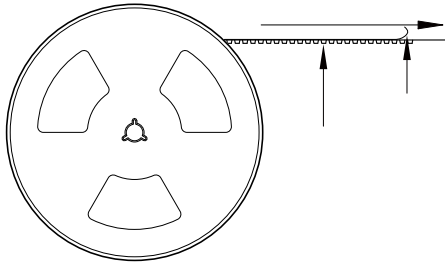

3000 Pcs/Reel



3 Reel /Inner box(9000 Pcs)



3 Inner box/Carton box(27K Pcs)

:

-
-
-
-
-
-
-
-
-
-