


# MDE Series




## FEATURES

- High rated current
- Frequency up to 3 MHz
- 125 C
- Low core loss
- Halogen Free & ROHS compliant

## APPLICATION

- Switch and servers
- SSD modules

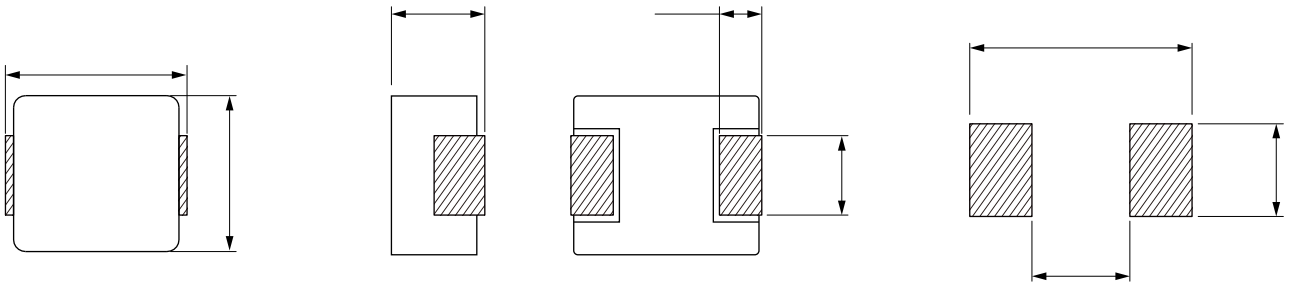

|  | ( $\mu$ H) | (m $\Omega$ ) | Saturation |      |
|--|------------|---------------|------------|------|
|  |            |               |            |      |
|  |            |               |            |      |
|  |            |               |            | 16.5 |
|  |            |               |            |      |
|  |            |               |            |      |
|  |            | 12.1          |            |      |
|  |            |               |            |      |
|  |            |               |            |      |
|  |            |               |            |      |
|  |            |               |            |      |
|  |            |               |            |      |
|  |            |               |            |      |
|  |            | 113           |            |      |

|  | ( $\mu\text{H}$ ) |  | ( $\text{m}\Omega$ ) | Saturation |  |
|--|-------------------|--|----------------------|------------|--|
|  |                   |  |                      |            |  |
|  |                   |  |                      |            |  |
|  |                   |  | 385                  |            |  |

△

